

R&S® HM8123 Universal Counter

Wide frequency range and accurate results



The perfect choice for

Engineering labs

Maintenance & repair

Education

General purpose

Key specifications

Measurement Range	DC to 3 GHz
- Input A/B (BNC)	DC to 200 MHz
- Input C (SMA)	100 MHz to 3 GHz
Input Impedance	
Input A/B	50 Ω or 1 MΩ, sensitivity 25 mV
Input C	50 Ω, sensitivity 30 mV
Input voltage	25 mV to 250 V (frequency dependent)

Key features

- 10-digit resolution (at 10 s gate time)
- Nine measurement functions, external GATE and ARMING connectors (BNC)
- External reference input (10 MHz) via BNC connector
- HM8123: TCXO (temperature stability: $\pm 0.5 \times 10^{-6}$)
- HM8123-X: OCXO (temperature stability: $\pm 1.0 \times 10^{-8}$)
- Burst measurements
- Fanless design

Your benefit	Features
High accuracy	<ul style="list-style-type: none"> High sensitivity and switchable attenuators to adapt to a wide range of input levels 10-digit resolution for precise measurements Optional OCXO for even higher accuracy
Two identical inputs A and B	Can be used for interchannel measurements such as frequency ratio A/B, time interval A:B, phase A to B
Additional input for higher frequencies	Widens the frequency range up to 3 GHz
Easy to use	Frequently used functions are directly accessible via front panel keys

► For more information, see www.rohde-schwarz.com/products/HM8123

ROHDE & SCHWARZ

宥億企業股份有限公司

YO IE ENTERPRISE CORP., LTD

Tel: +886-2-7746-3368
Fax: +886-2-2999-1178

E-mail: sales@yoie.com.tw
Web: www.yoie.com.tw

New Taipei City 241, Taiwan

地址: 241 新北市三重區重新路五段 609 巷 16 號 8 樓之 10


Add: 8F.-10, No.16, Ln. 609, Sec. 5, Chongxin Rd., Sanzhong Dist.,



Test & Measurement
Fact Sheet | 01.00


R&S® HM8123

External arming

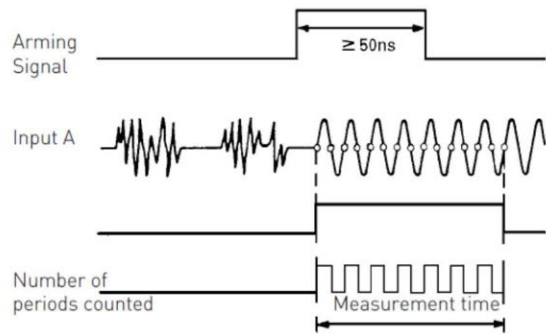

External arming prevents undesired signals from triggering of a measurement.

Ease of use

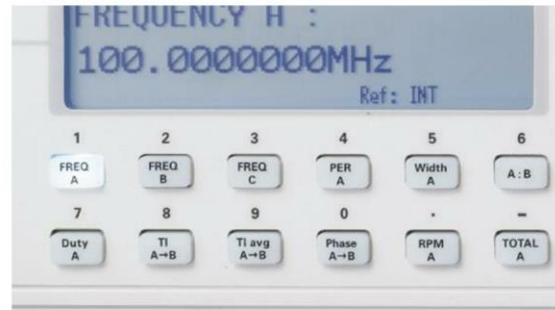

Intuitive one-push pushbutton operation makes each function directly addressable.

Ordering information

Base units

Description	Model
With TCXO (temp. stability: $\pm 0.5 \times 10^{-6}$)	R&S®HM8123
With OCXO (temp. stability: $\pm 1.0 \times 10^{-8}$)	R&S®HM8123-X

Options/system components

Description	Type
IEEE-488 Interface (GPIB)	R&S®HO880
19" rackmount kit, 2HU	R&S®HZ42

Included accessories:

All models include power cable, operating manual and three-year warranty.



3 measurement inputs as standard:
A/B: DC to 200 MHz
C: 100 MHz to 3 GHz



USB/RS-232 interface as standard.



R&S®HZ42
2 HU, 19" rackmount kit.



R&S®HO880
IEEE-488 GPIB interface.

Rohde & Schwarz Representative

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
PD 5214.9438.32 | Version 01.00 | July 2017 (ks)
Trade names are trademarks of the owners
The R&S®HM8123 Universal Counter
Data without tolerance limits is not binding | Subject to change
© 2017 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany

Rohde & Schwarz GmbH & Co.-KG
Europe, Africa, Middle East | +49 89 4129 12345
North America | 1 888 TEST RSA (1 888 837 87 72)
Latin America | +1 410 910 79 88
Asia Pacific | +65 65 13 04 88
China | +86 800 810 82 28 | +86 400 650 58 96
www.rohde-schwarz.com
customersupport@rohde-schwarz.com

宥億企業股份有限公司

YO IE ENTERPRISE CORP, LTD

Tel: +886-2-7746-3368
Fax: +886-2-2999-1178

E-mail: sales@yoie.com.tw
Web: www.yoie.com.tw

地址: 241 新北市三重區重新路五段 609 巷 16 號 8 樓之 10

Add: 8F.-10, No.16, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist.,
New Taipei City 241, Taiwan

